lambert&fils

CLARK SUSPENSION



type suspension

materials shade: brass (BR) or

powdercoated aluminium (BL/WH)

lamp holder

cover: marble / aluminium

lamp tube: frosted glass, Ø 2-1/4" / 57 mm

cable: aircraft steel cables

wire: nylon

wire length 96" / 2438 mm

light bulb AC LED board (included), 27 W (A)

AC LED board (included), 68 W (B)

voltage 120V / 240V

notes

dimmer refer to our recommended list of dimmer models


must be installed by an electricianadditional charges for modifications or for

special orders

– lead time between 8-9 weeks

- dimensions are approximate and may vary


slightly

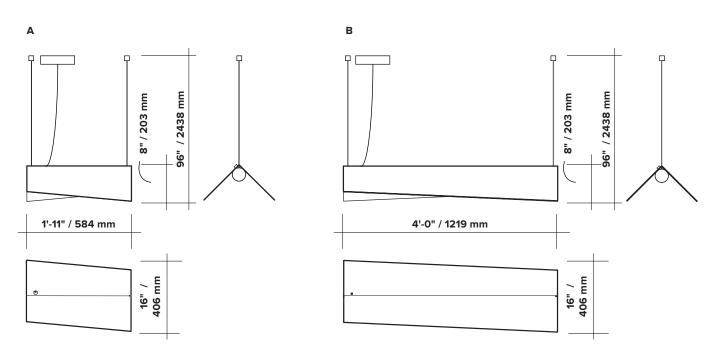

lambert&fils

ORDER GUIDE: SKU

COLLECTION	MODEL	FINISH	SIZE
CLA clark	02	BR brass BL black WH white	A 23" 584 mm B 48" 1219 mm
CLA	02	BR	A = CLA02BRA example
FINISH			









brass

flat black


white


lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

AC LED BOARD - SIZE A

AC LED BOARD - SIZE B





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.