

- PENDANTS: one
- CANOPY: mini canopy 29 (1.1") diameter
- LAMPING: 20w xenon or 1.5w LED (LED not dimmable)
- LENGTH OF COAX: 3000 (10') standard / 30550 (100') maximum
- INSTALLATION: strain relief (pendant light site adjustable)
- MATERIALS: raw porcelain glazed on one side, blown borosilicate glass, braided metal coaxial cable, silicon gaskets, electrical components and a white powder coated steel canopy
- WEIGHT: approximately 0.5kg (1lb)
- TRANSFORMERS: remote (does not hook directly to a junction box
1 transformer sent for every 5 pendants)

DESCRIPTION

The 'm' designation in this 21 variant refers to the mini canopy size. The mini canopy is just over 1" (29mm) in diameter and 0.5" (13mm) deep, which creates a subtle profile that will essentially disappear into the application surface.

Inspired by the sporadic, perhaps discordant arrangement of barnacles on a rock surface, the 21 is fabricated from thin sheets of porcelain wrapped around frosted borosilicate glass trumpet-shaped diffusers. Each diffuser houses a low voltage (12V, 20W xenon) lamp. A strong contrast is established between the organically distributed soft light passing through the translucent white porcelain skin and the sharp, crisp light passing through the borosilicate glass diffuser.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

US patent # D556, 361 Worldwide patents issued and pending.
Made in Vancouver, Canada

approx 0.5kg (1lb)


BOCCI Vancouver
sales@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca

Approved to UL standards by CSA




21.1m Design by Omer Arbel
PRODUCT SPECIFICATION



1


Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.

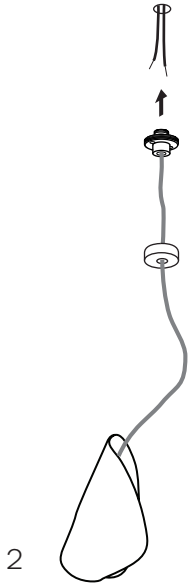

2

Drill a 9mm diameter hole in ceiling material. Pull low voltage house wire through the hole.

note: this low voltage wire will run to a remote mounted transformer.

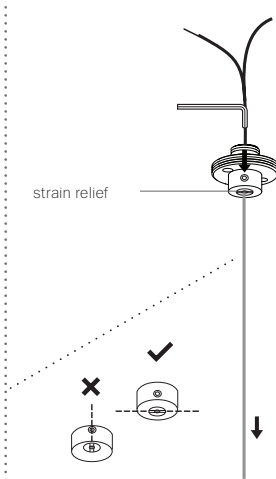


3

Thread the coaxial cable through the canopy. Throughout installation be mindful not to damage the borosilicate tube inside the pendant.

Determine the overall drop for the pendant fixture. Use the Allen key provided to loosen the setscrew in the canopy and gently feed the cable through the canopy until you have reached your desired drop length. Use Allen key to tighten the setscrew to 0.5 Nm to hold the strain relief to secure the coaxial cable at its new length.


Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening, on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable
- RISK OF ELECTRIC SHORT!

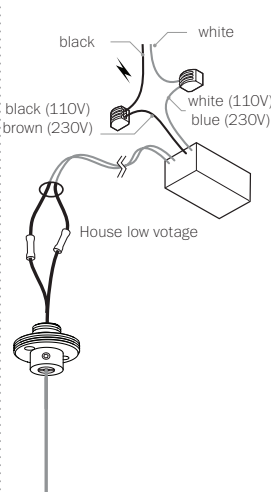

4

Connect the house wires to the coaxial cable using #16 butt splices (stagger the splices). Use raw butt splices and heat shrink to simplify the installation.


LED:
Note: Insulated core is positive and braided exterior is negative.

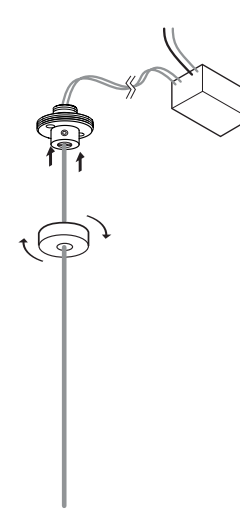

5

Affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded canopy cover plate into place.

Note: It may be helpful to rest the pendant on a surface higher than its final position so that the canopy may be fastened with greater ease.

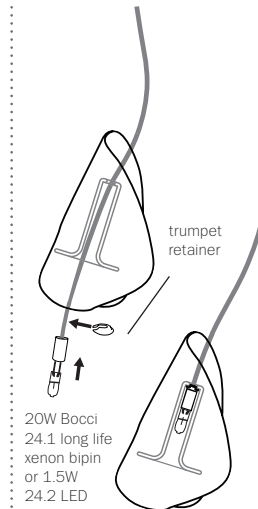


6

Thread the coaxial cable through the shade, followed by the trumpet and finally slide on the trumpet retainer.

Bocci 24.1 long life bipin xenon lamps included. Bocci 24.2 LED lamps optional. Lamping is transformer specific.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.

Carefully lower the assembly onto the lampholder.

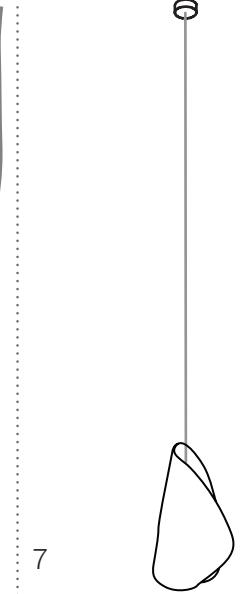

7

Turn fixture on.

Note: when using a dimmer, use only low voltage electronic dimmer.

Purchase replacement lamps online at www.bocci.ca/lamps

For additional assistance:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA

