lambert&fils

CLIFF SUSPENSION



suspension type

materials body: brass (BR)

milk glass (G50 / G80) sphere:

hardware: brass

total height 24" 36" 42"

610 mm | 762 mm | 914 mm | 1067 mm | 1372 mm

weight (min.) min. $3.7 \, lb / 1.7 \, kg - max. \, 4.1 \, lb / 1.9 \, kg$

light bulb LED (included), $1x 4.5W + 4 \times 3.5W$

sockets G9

120V / 240V voltage

dimmer refer to our recommended list of dimmer models


certifications ^cUlus C €


notes - must be installed by an electrician;

> – additional charges for modifications or for special orders;

- lead time between 8-9 weeks;

- dimensions are approximate and may vary slightly.

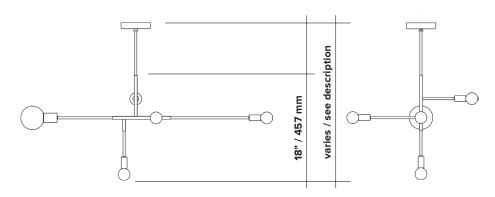



Updated: November 2017

lambert&fils

ORDER GUIDE: SKU



FINISH




CANOPY swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS SPHERES

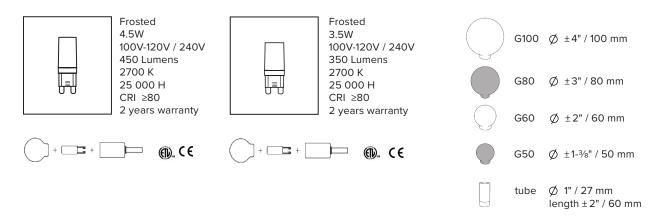

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ	V-PRO 3 996 35	100% 87%	2% 15%	no no	very good good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.