

adjustable  
up to 3000  
(10')  
standard

adjustable  
up to 30500  
(100')  
custom



152 (6')

±350 (13.7')

PENDANTS: three

CANOPY: brushed nickel canopy 152mm (6") diameter

LAMPING: 20w xenon or 1.5w LED (LED not dimmable)

LENGTH OF COAX: 3000 (10') standard / 30550 (100') maximum

INSTALLATION: strain relief (pendant light site adjustable)

MATERIALS: raw porcelain glazed on one side, blown borosilicate glass, braided metal coaxial cable, silicon gaskets, electrical components and a white powder coated steel canopy

WEIGHT: approximately 1kg (2.2lb)

TRANSFORMERS: integral

#### DESCRIPTION

21.3 is a random configuration of three 21 pendants hung from a round canopy. The pendants are designed to hang in a random configuration at times clustering and clumping together and others trailing off. The result is an ambient chandelier or field of light.

Inspired by the sporadic, perhaps discordant arrangement of barnacles on a rock surface, the 21 is fabricated from thin sheets of porcelain wrapped around frosted borosilicate glass trumpet-shaped diffusers. Each diffuser houses a low voltage (12V, 20W xenon) lamp. A strong contrast is established between the organically distributed soft light passing through the translucent white porcelain skin and the sharp, crisp light passing through the borosilicate glass diffuser.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

US patent # D556, 361 Worldwide patents issued and pending.  
Made in Vancouver, Canada

approx 1kg (2.2lb)

**BOCCI** Vancouver

[sales@bocci.ca](mailto:sales@bocci.ca)

[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin

[europe@bocci.ca](mailto:europe@bocci.ca)


[www.bocci.ca](http://www.bocci.ca)

Approved to UL standards by CSA




# 21.3

Design by Omer Arbel  
PRODUCT SPECIFICATION



1


Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.

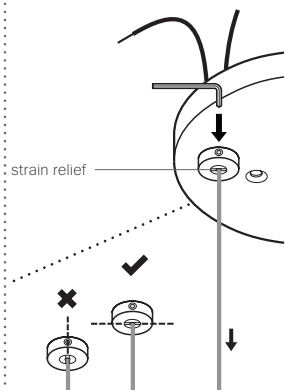

2

Thread the coaxial cable through canopy and determine the overall drop for the pendant fixture. Use the Allen key provided to loosen the setscrew in the canopy and gently feed the cable through the canopy until you have reached your desired drop length. Use Allen key to tighten the setscrew to 0.5 Nm to hold the strain relief to secure the coaxial cable at its new length. DO NOT OVERTIGHTEN.

Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable.  
- RISK OF ELECTRIC SHORT!

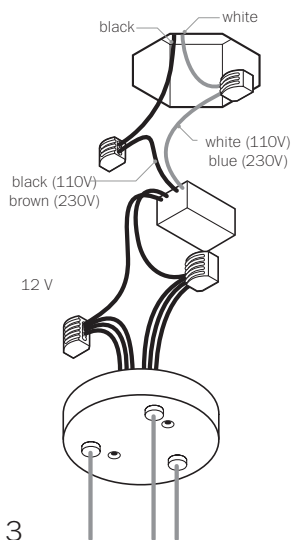


3

Connect the coaxial cable to the open slots in the terminal block on the 12V side of the transformer. Ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.

Once all those connections are made, lift the fixture into position and connect the line voltage to the unused matching terminals on the input wires.


LED:  
note: Insulated core is positive and braided exterior is negative.

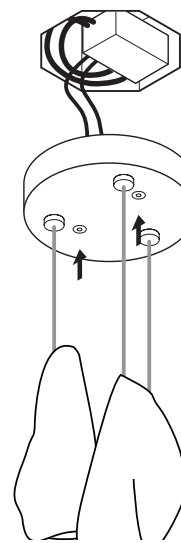

4

Tuck the transformer and wiring into the octagonal box, if available, and place canopy cover plate, lining up the fastener holes or connect directly to structural ceiling surface. Affix canopy cover with fasteners provided.

Note: It may be helpful to rest the pendant on a surface higher than its final position so that the canopy may be fastened with greater ease.

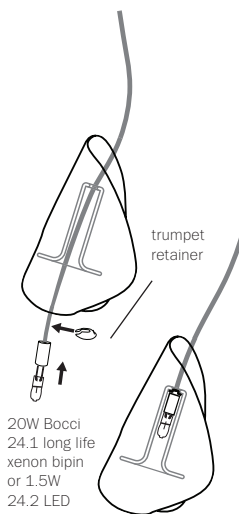

6

Thread the coaxial cable through the shade, followed by the trumpet and finally slide on the trumpet retainer.


Biocci 24.1 long life bipin xenon lamps included. Biocci 24.2 LED lamps optional. Lamping is transformer specific.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.

Carefully lower the assembly onto the lampholder.

Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)

Note: when using a dimmer for xenon, use only low voltage electronic dimmer to ensure the fixture works properly.

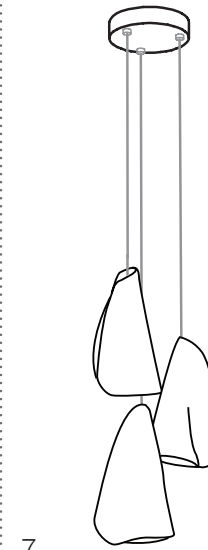

7

Clean fingerprints from glass surfaces.

Turn fixture on.

\*  
For additional assistance, please contact Bocci:

**BOCCI** Vancouver  
[info@bocci.ca](mailto:info@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin  
[europa@bocci.ca](mailto:europa@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA

