# lambert&fils

## LAURENT 09




type	suspension	suspension					
materials	sphere: frame:	handblown opaline glass polished brass or powder coated aluminum or nickel plated steel					
	hardware:	polished brass or powder coated aluminium					
	wire:	nylon/polyester					
weight	9 lb / 4 kg						
light bulb	· · ·	LED (included), 4,5W (see lightbulb section for specifications)					
sockets	G9						
voltage	120V / 240V	120V / 240V					
dimmer	refer to our recommended list of dimmer models						
certifications							
notes	<ul> <li>must be installed by an electrician</li> <li>additional charges for modifications or for special orders</li> </ul>						


- lead time between 8 to 9 weeks.

- dimensions are approximate and may vary slightly.


parallel wires








23" / 400 mm

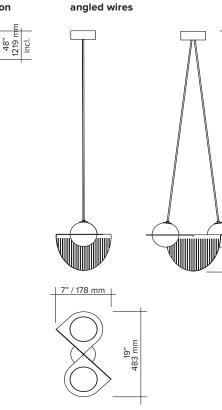

min, 30" / 762 mm

# lambert&fils


## **ORDER GUIDE: SKU**

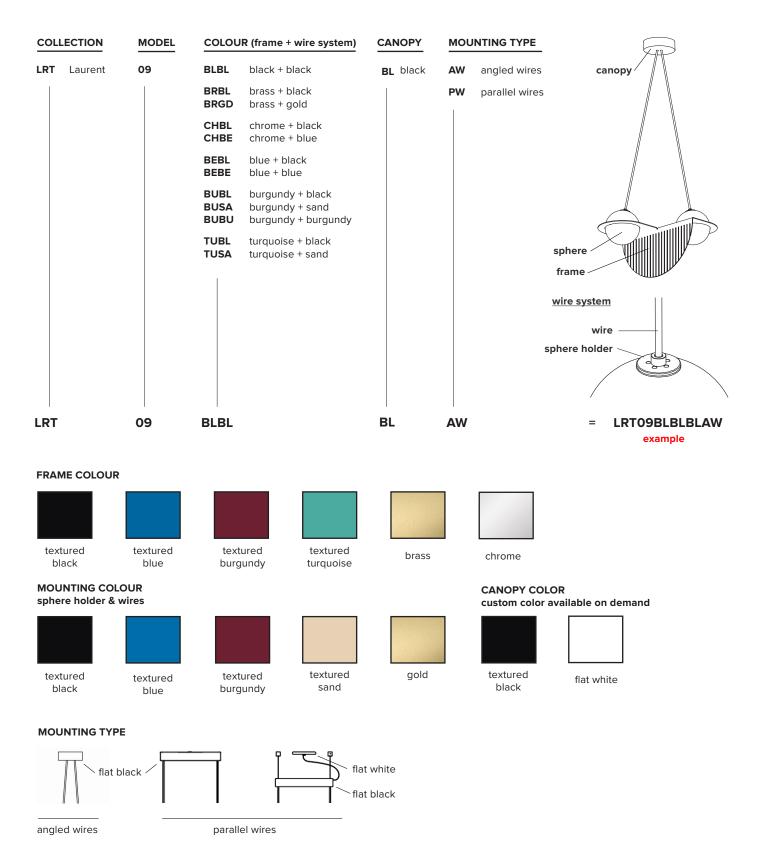

# lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS

#### **G9 SOCKETS**



+ 🗖 + 🗖 –

Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

**DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V** 

.€

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.