


2615

Design By Arik Levy

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

Model Sheet

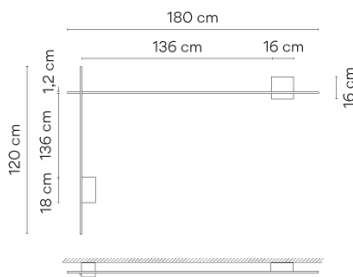

Finish

- 15 Grey L2
NCS S 2500-N
- 21 Black Grey
NCS S 7000-N

LED temperature color 3000 K / 3500 K

Dimming 1-10V / DALI-2 / Casambi

Installation type Surface Canopy

Materials

- Body: Aluminum
- Diffuser: PC- Polycarbonate
- Profile: Aluminum

LED

- CRI>90
- 3000 K / 3500 K

Driver Constant Voltage 110~240 V V
50~60 Hz HZ

Remarks Only one main input by square box 16x16cm.

Application Wall Lamps


Packaging

- 2 Box
- 0.224 m x 0.325 m x 0.37 m
- Gross weight 4.6
- Net weight 2.55
- Vol. 0.0361



Lighting effect

General lighting - opaque shade

Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric Data

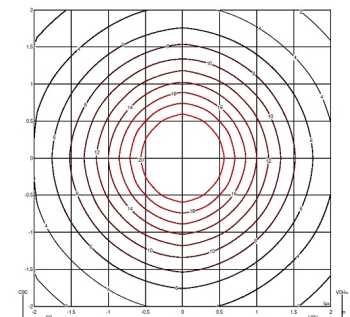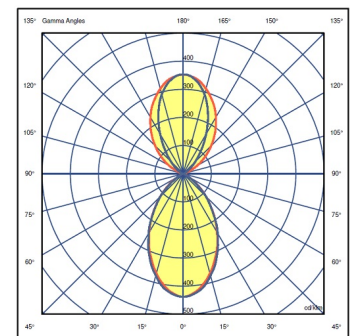


Efficiency 100.00%

Coordinate System CG

Total Flux 378.81 lm

Maximum Value 438.41 cd/klm

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com