lambert&fils

WALDORF SUSPENSION TRIPLE



type suspension

materials shade: powder coated steel

& aluminium

body: powder coated aluminium

sphere: milk glass (G60)

hardware: brass

canopy: powder coated steel

 total height
 24"
 28"
 32"
 36"
 42"
 54"

 610 mm
 711 mm
 813 mm
 914 mm
 1067 mm
 1372 mm

weight min. 4.8 lb / 2.2 kg - max. 5.1 lb / 2.3 kg

light bulb LED (included), 3x 4.5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications certification certification


notes – must be installed by an electrician;

additional charges for modifications or for special orders;

lead time between 8-9 weeks;


- dimensions are approximate and may vary

slightly.

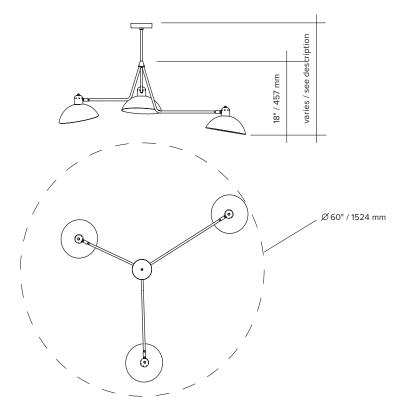


lambert&fils

ORDER GUIDE: SKU

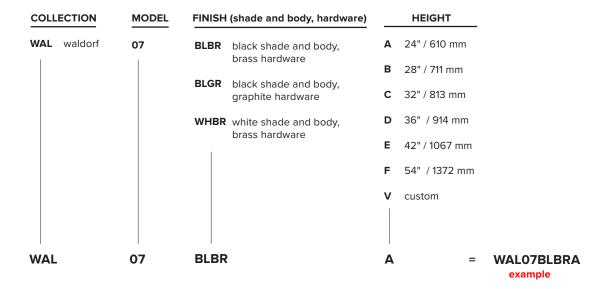


FINISH



CANOPY swivel option for slanted ceiling






lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS


G9 SOCKETS







SPHERES



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.